


RL-C SX polyester filtering net - 50 micron washable cartridge - easy-clean

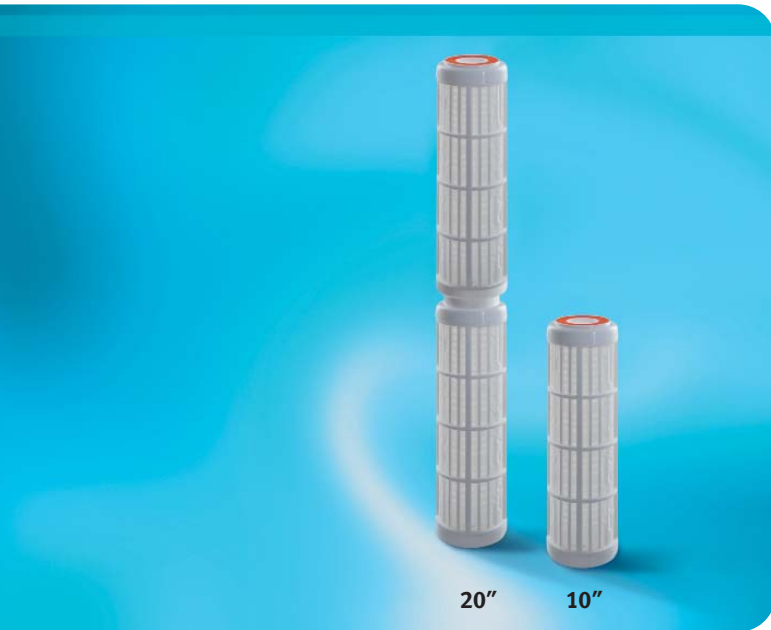

APPLICATIONS

RL-C is designed to make the cartridge cleaning easier; the frame is reduced to achieve a complete surface wash.

Filtration of: sand, scales, rust.

Domestic use: filtration of drinking water, protection of taps, boilers, washing machines and other installations.

Technical use: pre-filtration for water-pumps, irrigation systems, protection of industrial installations.

Average life-span: about 24 months.

Maintenance: wash every 3 months.

WORKING CONDITIONS

Max working temperature _____ 45°C

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

Filtrating medium: polyester net.

Armouring: polypropylene.

End caps: polypropylene.

Flat seals: PVC.

R01-03/09 - Subject to change without notice


suitable housing	cartridge model	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Senior	RL-C 10 SX 50 mcr	10"	250	70	30	1600
Master	RL-C 20 SX 50 mcr	20"	505	70	30	3000




VARIANTS available on minimum quantity

Cartridges with different filtration rates.

Cartridges with double O-ring quick-fit system **BX** (collar diameter 45 mm) and **AX** (collar diameter 39.70 mm).

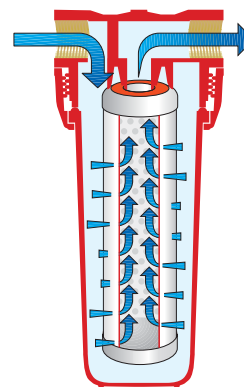

RL SX polyester filtering net - 50 micron washable cartridge

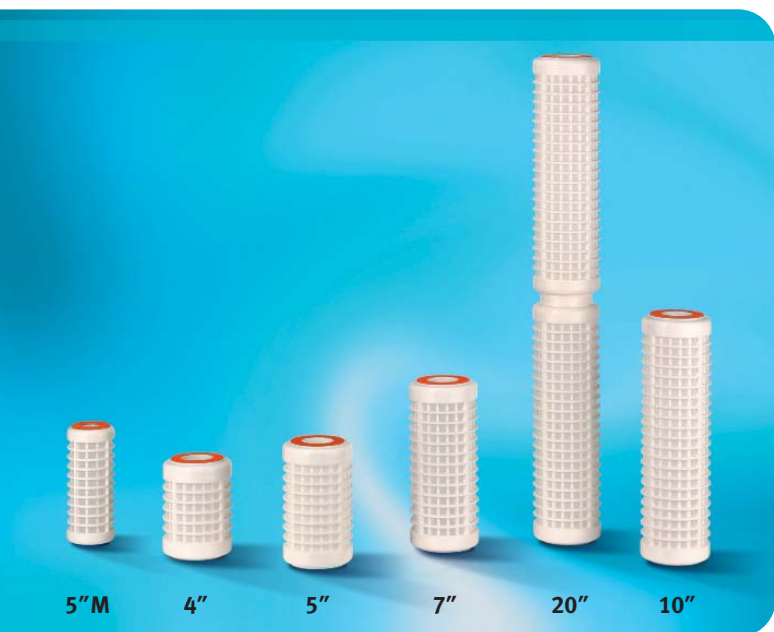

APPLICATIONS

RL is designed also for applications where back-wash is required; the enhanced frame makes the cartridge resistant to counter-current washing.

Filtration of: sand, scales, rust.

Domestic use: filtration of drinking water, protection of taps, boilers, washing machines and other installations.

Technical use: pre-filtration for water-pumps, irrigation systems, protection of industrial installations.

Average life-span: about 24 months.

Maintenance: wash every 3 months.

WORKING CONDITIONS

Max working temperature _____ 45°C

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.


Filtration medium: polyester net.

Armouring: polypropylene.

End caps: polypropylene.

Flat seals: PVC.

suitable housing	cartridge model	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Mignon	RL Mignon SX 50 mcr	5''M	122	50	20	500
Cadet	RL 4 SX 50 mcr	4''	106	70	30	650
Medium	RL 5 SX 50 mcr	5''	125	70	30	800
Junior	RL 7 SX 50 mcr	7''	173	70	30	1100
Senior	RL 10 SX 50 mcr	10''	250	70	30	1600
Master	RL 20 SX 50 mcr	20''	505	70	30	3000

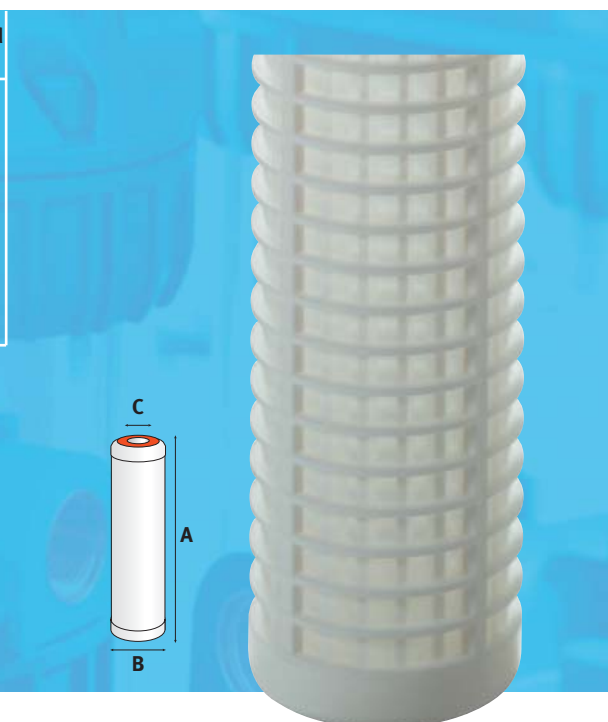

VARIANTS available on minimum quantity

Cartridges with different filtration rates.

Cartridges with double O-ring quick-fit system **BX** (collar diameter 45 mm) and **AX** (collar diameter 39.70 mm).

