





3P SX PP

WORKING CONDITIONS

Max working pressure in water with neutral pH _____ 8 bar (116 psi)
 Max working pressure in water with non-neutral pH _____ 3 bar (43 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: polypropylene.
 Bowl: polypropylene.
 O-ring: EPDM.
 Breather-valve: polypropylene, o-ring EPDM.

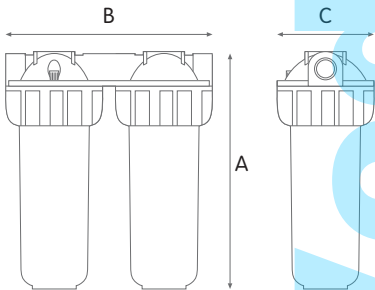

3P SX PP housings

HOUSINGS WITH PLASTIC BSP THREADS

CODE	MODEL	SUITABLE CARTRIDGE	IN/OUT	THREADS	DIMENSIONS mm		
					A	B	C
RA1010213	MIGNON L 3P MFP PP	5" M	1/2"	PLASTIC-BSP	176	94	89
RA1030213	MIGNON S 3P MFP PP	5" M	1/2"	PLASTIC-BSP	176	90	89
RA1070513	MEDIUM 3P AFP SX PP	5"	3/4"	PLASTIC-BSP	191	133	130
RA1070813	MEDIUM 3P BFP SX PP	5"	1"	PLASTIC-BSP	197	145	130
RA1090513	JUNIOR 3P AFP SX PP	7"	3/4"	PLASTIC-BSP	241	133	130
RA1090813	JUNIOR 3P BFP SX PP	7"	1"	PLASTIC-BSP	247	145	130
RA1110513	SENIOR 3P AFP SX PP	10"	3/4"	PLASTIC-BSP	315	133	130
RA1110813	SENIOR 3P BFP SX PP	10"	1"	PLASTIC-BSP	321	145	130
RA1150513	MASTER 3P AFP SX PP	20"	3/4"	PLASTIC-BSP	571	133	130
RA1150813	MASTER 3P BFP SX PP	20"	1"	PLASTIC-BSP	577	145	130

DUPLEX 3P SX PP

3P DUPLEX SX PP housings

HOUSINGS WITH PLASTIC BSP THREADS

CODE	MODEL	SUITABLE CARTRIDGE	IN/OUT	THREADS	DIMENSIONS mm		
					A	B	C
RA1020213	MIGNON DUPLEX 3P MFP PP	5" M	1/2"	PLASTIC-BSP	176	194	89
RA1080513	MEDIUM DUPLEX 3P AFP SX PP	5"	3/4"	PLASTIC-BSP	191	275	130
RA1100513	JUNIOR DUPLEX 3P AFP SX PP	7"	3/4"	PLASTIC-BSP	241	275	130
RA1120513	SENIOR DUPLEX 3P AFP SX PP	10"	3/4"	PLASTIC-BSP	315	275	130
RA1160513	MASTER DUPLEX 3P AFP SX PP	20"	3/4"	PLASTIC-BSP	571	275	130

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- 3P BX PP housings
- 2P SX PP housings