



DEPURAL® TOP

WORKING CONDITIONS

Max working pressure _____ 3 bar (43 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: polypropylene.
 White bowl: SAN.
 O-rings: EPDM.

www.VodneFiltre.sk



DEPURAL® TOP ECO BW

WHITE HOUSING

CODE: RA2511615
 SUITABLE CARTRIDGES: 10"



DEPURAL® TOP DUO ECO BW

WHITE HOUSING

CODE: RA2521615
 SUITABLE CARTRIDGES: 10"



DEPURAL® TOP TRIO ECO BW


WHITE HOUSING

CODE: RA2531615
 SUITABLE CARTRIDGES: 10"

DEPURAL® TOP DVB BW

WHITE HOUSING


CODE: RA2510615
 SUITABLE CARTRIDGE: 10"



DEPURAL® TOP DUO DVB BW

WHITE HOUSING

CODE: RA2520618
 SUITABLE CARTRIDGES: 10"

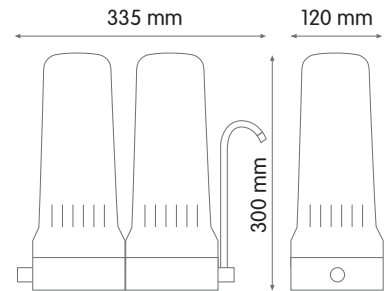

DEPURAL® TOP TRIO DVB BW

WHITE HOUSING

CODE: RA2530615
 SUITABLE CARTRIDGES: 10"

