

HOT water filters



**HOUSINGS AND CARTRIDGES
SX SERIES
WITH STANDARD FLAT SEALS**

**CARTRIDGE TYPES:
WOUND POLYPROPYLENE THREAD
MELT-BLOWN POLYPROPYLENE
STAINLESS STEEL NET**

housings Plus Hot 3P SX

for cartridges with standard flat seals



Senior

APPLICATIONS

Filtration of hot water with neutral pH and drinking water.

Domestic use: filtration and treatment of drinking water, protection of taps, boilers, washing machines, and other installations.

Technical use: pre-filtration, micro-filtration; protection of pumps, heating systems, softeners, demineralising and chlorine-removing appliances, reverse osmosis units.

WORKING CONDITIONS

Max working pressure _____ 8 BAR

Max working temperature _____ 80°C

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

Head and ring nut and bowl: reinforced polyamide.

O-ring: ETP.

Breather-valve: body polypropylene, O-ring ETP.


R02-09/07. Subject to change without notice

Cartridge height	housings with opaque bowl AB IN/OUT plastic FP female threads	IN/OUT threads	mm	
			A	B
10"	Senior Plus Hot 3P MFP SX AB	1/2"	315	133
10"	Senior Plus Hot 3P AFP SX AB	3/4"	315	133
10"	Senior Plus Hot 3P BFP SX AB	1"	321	145

suitable housing	cartridges applicable for hot water filtration	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Senior	FA 10 HOT SX*	10"	250	61	28	1000
Senior	CPP 110 SX 1 mcr	10"	250	65	29	1500
Senior	CPP 110 SX 5 mcr	10"	250	65	29	1500
Senior	CPP 110 SX 10 mcr	10"	250	65	29	1500
Senior	CPP 110 SX 25 mcr	10"	250	65	29	1500
Senior	PP 110 SX 1 mcr	10"	250	65	29	1500
Senior	PP 110 SX 5 mcr	10"	250	65	29	1500
Senior	PP 110 SX 10 mcr	10"	250	65	29	1500
Senior	PP 110 SX 25 mcr	10"	250	65	29	1500
Senior	XL 10 LB 50 mcr	10"	250	60	30	1600

*Available Filtration rates, in micron (mcr)

5 mcr 10 mcr 25 mcr 50 mcr 100 mcr

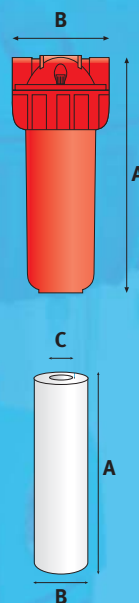

CARTRIDGE SPECIFICATIONS

FA HOT filtering medium: polypropylene thread; inner core: reinforced polypropylene.

CPP filtering medium: melt-blown polypropylene micro-fibres.

PP filtering medium: melt-blown polypropylene micro-fibres.

XL filtering medium, inner core and end caps: stainless steel AISI 304.

FA HOT PP CPP XL



accessories



-U- Spanner



-S- wall bracket



wall bracket screws

